



Our *passion* is enclosures.

Check list profiPLUS

Customer:

Contact partner:

Phone:

Email address:





Our passion is enclosures.

Standard execution

Surface coating:	Powder coating RAL 7035, light grey
Covers:	Plastic (POM) RAL 7016, anthracite grey
Support profile:	Extruded aluminium, silver anodised, Fastening thread preformed
Bellows:	PVC-P, RAL7016, anthracite grey
Ingress protection:	IP54 / EN 60529
Potential equalisation:	DIN VDE 0113 / EN 60204-1 / IEC 204-1
Matching control enclosures:	multiPANEL, multiVISION, topVISION, commandCASE, aluFACE

Project data

Target price: _____ €/


Quantity systems: _____

Delivery time: _____

Load-bearing capacity: _____ Kg

Special colour system elements: RAL _____

Load-bearing capacity

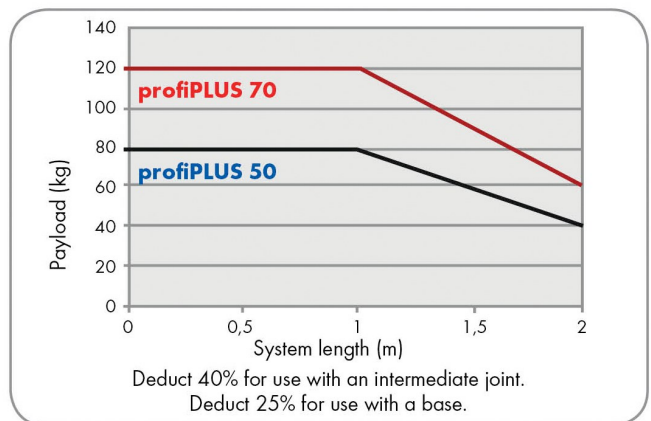

System configuration

profiPLUS 50

profiPLUS 70

Horizontal installation, further page 3

Samples system configuration



Vertical installation, further page 4

Samples system configuration



Vertical installation



A
**Wall joint, vertical



A
**Socket joint, vertical



A
**Base

****It's not allowed with intermediate joint!**

Support profil 1 **B**

250mm

500mm

750mm

1000mm

1500mm

_____mm



Elbow



Signal light adaption **D**

Support profil 2 **C**

250mm

500mm

_____mm

Support profil 3 **F**


250mm

500mm

750mm

1000mm

_____mm

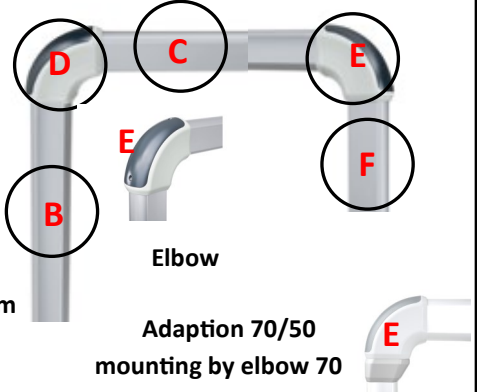

Adaption 70/50
mounting by elbow 70



Signal light adaption **E**

Enclosure couplings **G**

***Coupling with fitted support profile**

***Coupling**

H

2 oder 3



hanging

upright

***Coupling N**

H

2 oder 3




hanging

upright

Elbow coupling

H

2 oder 3

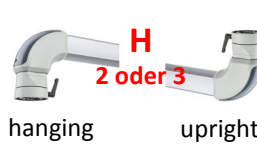

hanging

upright

Elbow coupling N

H

2 oder 3



hanging

upright

***Desk coupling N**



hanging

upright

Elbow desk coupling N



hanging

upright

***Panel coupling**



hanging

upright

***Panel coupling N**



hanging

upright

Elbow panel coupling



hanging

upright

Elbow panel coupling N



hanging

upright

Adapter for Panels **H**



Beckhoff-Adapter Ø48



B&R Adapter Ø48



Siemens-Adapter



1 Only connect with support profile 50