

Inquiry form taraSMART

Customer:

Contact partner:

Phone:

Email address:

Quantity systems:

Target price:



taraSMART



Our passion is enclosures.

Standard execution

Surface coating:	Powder coating RAL7035
Covers:	Plastic RAL 7016
Support profile:	Extruded aluminium, silver anodised
Round tube:	Powder coating, silver dull
Ingress protection:	IP54 / EN 60529
Matching control enclosures:	profiPANEL, multiPANEL, commandCASE, aluFACE


Projektdaten

Quantity systems:

Delivery time:

Load-bearing capacity:

Load-bearing capacity

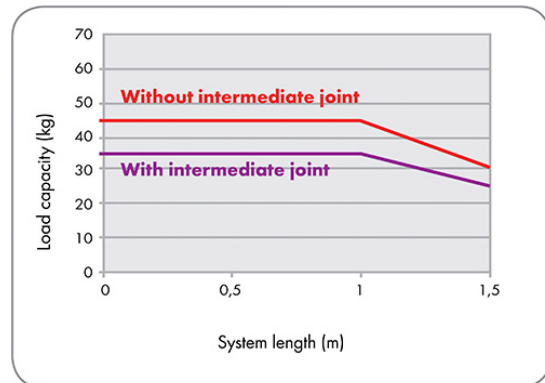

Horizontal installation




Vertical installation





Horizontal installation

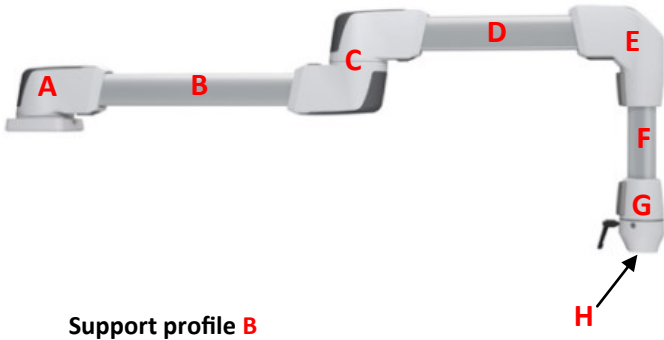

Socket joint



Wall joint



Support profile **B**

- 250mm
- 500mm
- 750mm
- 1000mm

_____ mm



Intermediate joint

Support profile **D**

- 250mm
- 500mm
- 750mm
- 1000mm

_____ mm

Support profile / Round tube \varnothing 48 **F**

- 250mm
- 500mm
- 750mm
- 1000mm

_____ mm



Elbow profile



Elbow \varnothing 48



Coupling profile



Coupling \varnothing 48




Panel coupling profile



Panel coupling \varnothing 48

Vertical installation

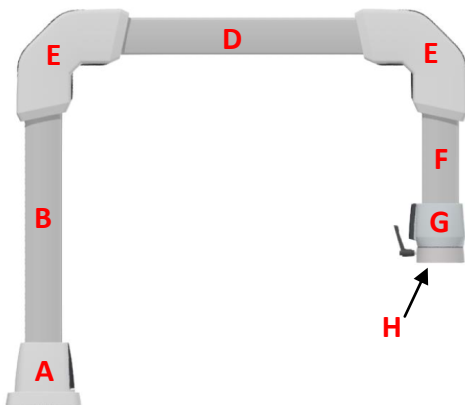

Base



Socket joint, vertical



Wall joint, vertical

Support profile **B**

- 250mm
- 500mm
- 750mm
- 1000mm

_____ mm

Support profile **D**

- 250mm
- 500mm
- _____ mm

Support profile / Round tube \varnothing 48 **F**

- 250mm
- 500mm
- 750mm
- 1000mm

_____ mm



*Siemens adapter



*VESA adapter

***Not suitable for Panel couplings**